
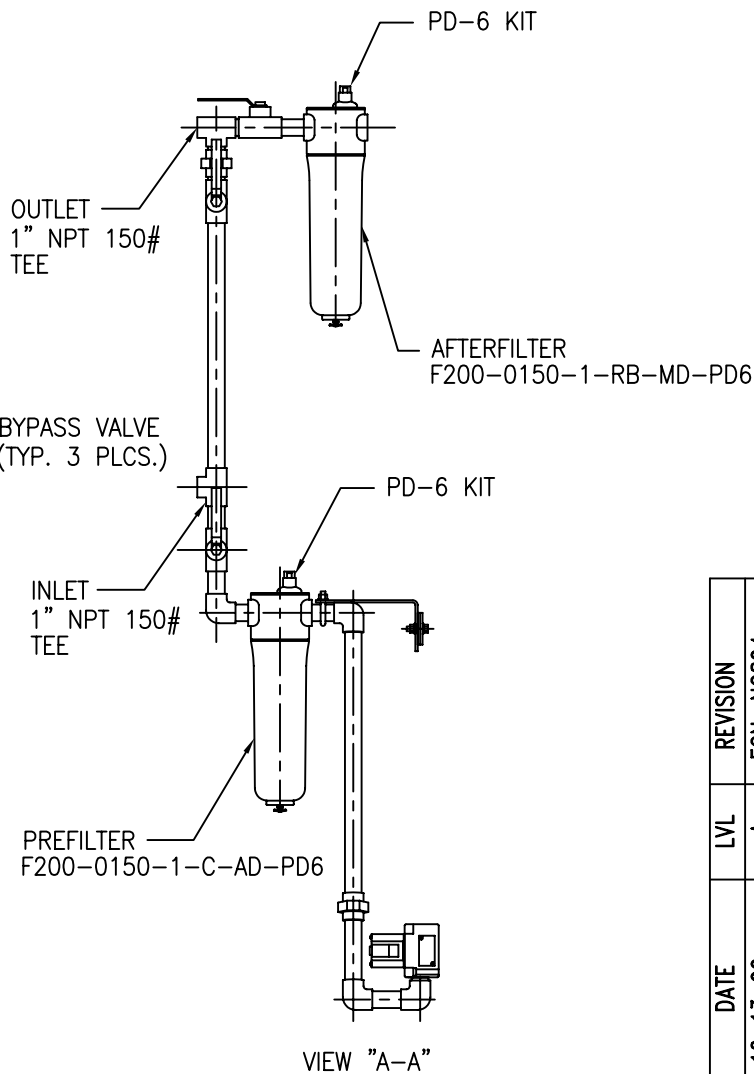


NOTES:

- 1) SYSTEM AMBIENT OPERATING TEMPERATURE RANGE: 40°F TO 120°F.
- 2) SYSTEM INLET OPERATING TEMPERATURE RANGE: 40°F TO 120°F.
- 3) SYSTEM OPERATING PRESSURE RANGE: 60 PSIG TO 150 PSIG.
- 4) SYSTEM RATED FLOW: 120 SCFM @ 100 PSIG, 100°F.
- 5) APPROXIMATE WEIGHT OF UNIT: 420 LBS (WITH DESICCANT).

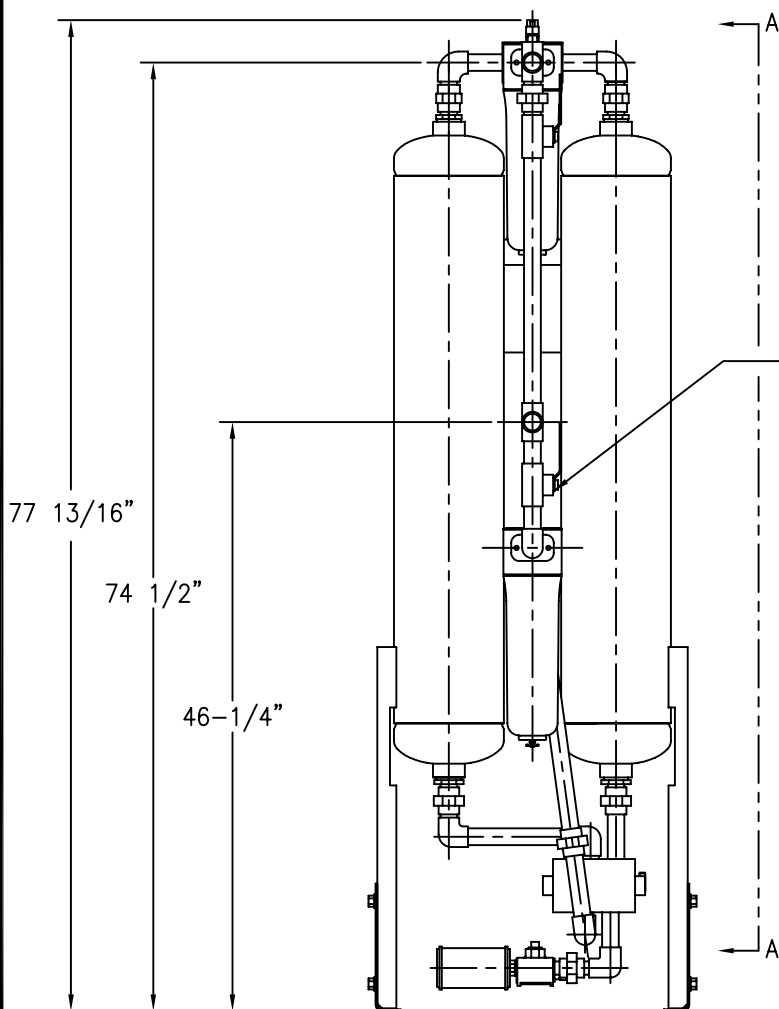

This drawing is the property of

VAN AIR SYSTEMS INC

and is subject to return upon request. It shall not be copied or duplicated in any manner and shall not be submitted to outside parties for examination without the consent of Van Air Systems Inc. It shall be used for reference to work under contract or proposals submitted by Van Air Systems Inc. only.

HEATLESS REGENERATIVE DRYER HLS-120 WITH MOUNTED FILTERS & 3 VALVE BYPASS

DRWN BY: KAL

DATE: 3-12-98

DRWG No.

CHECKED:

SCALE: NONE

SD-13550

REV
A

APPL:

VAN AIR SYSTEMS INC

Lake City, PA 16423 (814)774-2631 Fax: 814/774-3482 Telex: 91-4548

APP'L	DATE	LVL	REVISION	ECN: N0894
	10-13-99	A		